


### TerraFit™ – PUZZLE

#### ABOUT

A wide range of rubber rolls available in an extensive collection of colors for use in intensive gym environments. Made of Styrene-Butadiene Rubber (SBR) which is a copolymer of styrene and butadiene characterized by its superior hardness & durability where heavy weight loads and dumbbell falls are usual.

#### PERFORMANCE ATTRIBUTES

- Compatible with most floor finishes.
- Fast installation.
- Natural elasticity reduces noise.
- Antistatic

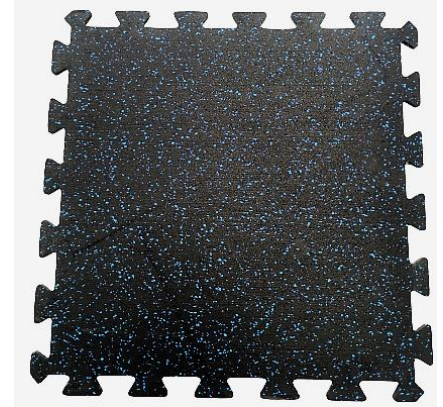

#### DIMENSIONS

- Size (cm): 100 x 100 & 50 x 50
- Thickness (mm): 6,8,10
- Standard Tolerances: Width: +/- 3 mm  
Length: +/- 3mm  
Thickness: +/-2m

#### MATERIAL

- 85% SBR granulated + 15% EPDM granulated in 20+ color combinations.

#### TECHNICAL DATA

PROPERTY	TEST METHOD	UNITS	TEST RESULTS
Tear	ASTM D 624	KN/m	13.6 – 16.2
Shore A Hardness	DIN 53505	Shore A	60 (+/- 5)
Compression Set	DIN 53517	%	15
Abrasion	DIN 53516	mm <sup>3</sup>	164-178
Tensile Strength	EN ISO 1798	N/mm <sup>2</sup>	2 – 2.4
Elongation At Break	EN ISO 1798	%	166 - 201
Coefficient of Friction	EN 13893:2002	μ	0.47 (safe)
Fire Resistance	DIN EN 13501-1	E <sub>fl</sub>	B2
Light Fastness	DIN EN 105-B02:1999-09		2-3
Electrostatic Properties	DIN EN 1815:1995-06	kV	0.5
Remaining Deformation	EN 433:1994-11	mm	0.13
Reduction of Impact Sound Pressure Level	DIN EN ISO 140-8:1998-03	ΔL <sub>w</sub>	18dB
Use With Wheel Chairs	DIN EN 1307:1997-06		For permanent use adapted

\*The values & properties stated above are carried out in our lab for the component used in the production. However, they do not constitute a guarantee for a specific product feature & do not establish a legal contract

#### CERTIFICATIONS



#### CONTACT

+971 4 263 2332 | +971 55 325 2253  
 inquiry@terrainfloorings.com  
 terrainfloorings.com

