


### TerraTuf® – LINK MATS

#### ABOUT

These mats are similar in design to the hollow mats, with the added advantage of linkable edges, that allow easy installation with custom configurations. They are used in areas where the requirement is to cover large areas at once.

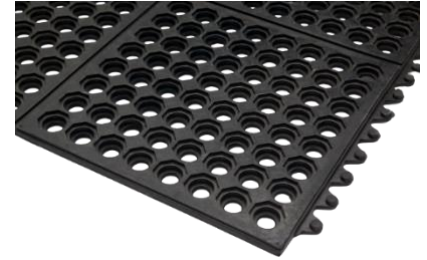

#### PERFORMANCE ATTRIBUTES

- Anti-fatigue & Anti-Slip.
- Fast installation.
- Natural elasticity reduces noise.
- Antistatic
- Easy drainage

#### DIMENSIONS

- Size: 90x90 cm
- Thickness (mm): 14
- Type: Punched or Unpunched holes
- Weight: 6.75kgs
- Standard Tolerances: Width: +/- 3 mm  
Length: +/- 3mm  
Thickness: +/-2mm

#### MATERIAL

- Blend of NR-SBR compound
- Available in Black and other colors upon request.

#### TECHNICAL DATA

PROPERTY	TEST METHOD	UNITS	TEST VALUES
Shore Hardness	ASTM D2240-97	Shore A	60±5
Specific Gravity	ASTM D792	g/cm <sup>3</sup>	1.3±0.05
Tensile Strength	ASTM D412-98A	MPa	Min 5
Elongation at Break	ASTM D412-98A	%	Min 350
Compression Set @ 70°/ 22hrs	ASTM D395-98	%	25 Max
Abrasion Loss	ASTM D5963	mm <sup>3</sup>	200 Max

Working Temperature upto 70 °C

Good Abrasion Resistance

\*The values & properties stated above are carried out in our lab for the component used in the production. However, they do not constitute a guarantee for a specific product feature & do not establish a legal contract

#### CERTIFICATIONS



#### CONTACT

+971 4 263 2332 | +971 55 325 2253  
 inquiry@terrainfloorings.com  
 terrainfloorings.com

